


NOTES:

1. Inner and outer threads are of the same size and pitch.
2. Filter mount and retaining ring are black anodized aluminum.
3. All dimensions indicated in mm.

Mount Size	A	B	C	D	E
M13.25 x P0.5	14.25	10.55	7.5	5.7	12.8
M22.5 x P0.5	24	18.5	7	5.2	20.2
M25.4 x P32TPI	25.2	19.5	3	N/A	22
M25.5 x P0.5	27.5	21	7	5.2	22.7
M27 x P0.5	29	22.5	7	5.2	24.5
M30.5 x P0.5	32.5	25.5	7	5.2	27.7
M34 x P0.5	36	29	7	5.2	31.2
M35.5 x P0.5	37.5	30.5	7	5.2	32.7
M37 x P0.75	39	32.5	7	5.2	34.2
M37.5 x P0.5	39.5	32.5	7	5.2	34.2
M40.5 x P0.5	42.5	35.5	7	5.2	38.2
M43 x P0.75	45	38	7	5.2	40.2
M46 x P0.75	48	41	7	5.2	43.2
M49 x P0.75	51	44	7	5.2	46.2
M52 x P0.75	54	47	7	5.2	49.2
M55 x P0.75	57	50	7	5.2	52.2
M58 x P0.75	60	53	7	5.2	55.2
M62 x P0.75	64	57	7	5.2	59.2
M67 x P0.75	70	62.5	8	5.5	64
M72 x P0.75	75	67.5	8	5.5	69
M77 x P0.75	80	73	8	5.5	74.3
M82 x P0.75	84	77.5	8	5.5	80
M86 x P1.0	88	81	7.2	4.6	84
M95 x P1.0	98	90	10.1	7.1	92.3
M105 x P1.0	108	100.5	8.8	6.1	102.1

Threaded Retaining Ring,
1.8mm Nominal Thickness

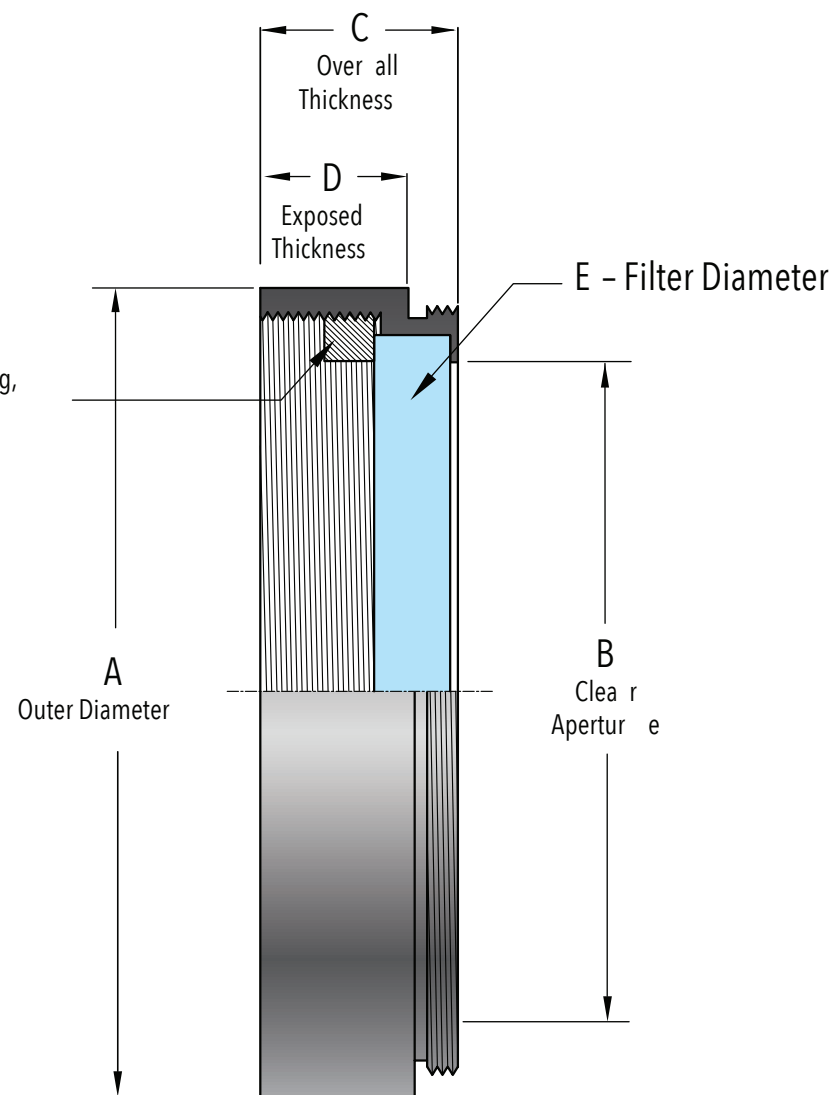

標準フィルターマウント



瞬間を捉え、見えないものを視る。

日進電子工業株式会社