

101

NISSIN LED Luminar
MODEL CR-30T

LAMP 1
BRIGHT LEVEL ADJUST
0 5 10
HIGH LOW

LAMP 2
BRIGHT LEVEL ADJUST
0 5 10
HIGH LOW

LAMP 3
BRIGHT LEVEL ADJUST
0 5 10
HIGH LOW

POWER

1

2

3

NISSIN ELECTRONIC CO.
JAPAN

16 150

側面

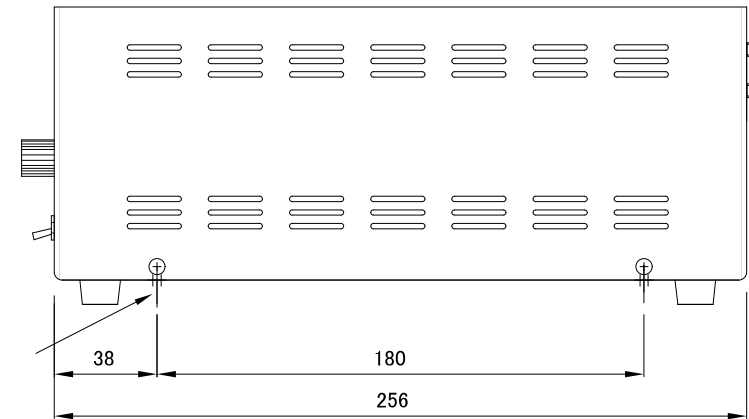


Diagram illustrating the rear view of the CR-30T power supply unit, showing various terminals and labels:

- 4**: Points to the output terminals for LAMP 3, LAMP 2, and LAMP 1.
- 5**: Points to the EXTERNAL SIGNAL IN LAMP ON/OFF terminal.
- 6**: Points to the AC IN terminal (AC85~132V).
- 7**: Points to the mounting bracket.
- Labels on the unit:**
 - OUT (for LAMP 3) OUT (for LAMP 2) OUT (for LAMP 1)
 - Total Max. 30Watts
 - EXTERNAL SIGNAL IN LAMP ON/OFF
 - AC IN (AC85~132V)
 - MODEL CR-30T
 - SERIAL No.
 - NISSIN ELECTRONIC CO.
 - 日進電子 工業株式会社
 - JAPAN

1. POWER ON/OFF 電源スイッチ
 2. BRIGHT LEVEL ADJUST 調光ボリューム
 3. HIGH/LOW 光量HIGH/LOW切替スイッチ
 4. EXT(for LAMP) 照明コード接続用コネクタ
 5. OUT.CONTROL IN (LAMP ON/OFF) 点灯制御用コード接続コネクタ
 6. AC IN AC 電源入力コネクタ(-2の場合は、AC85~264V)
7. プラスチック足(取り外し可)

H	△	- -			
	△	- -			
	△	- -			
	△	- -			
	△	- -			

直流電圧接続点灯用電源				型式		CR-30T CR-30T-2	
						アナログボリューム調光型	
						日進電子工業株式会社	
			松井				
			25.11.13				
			初版	2024	四葉		